
FUTUREENERGY

Specification


Futureenergy, 48V 1kW Permanent Magnet Generator

Prepared By


D. Nangle, November 2016

Contents

Dimensions	3
Specification	4
Graph: Power vs RPM @ Load Resistances (Ω)	5
Graph: Terminal Voltage vs RPM @ Load Resistances	6
Graph: Terminal Current vs RPM @ Load Resistances	7
Graph: DC Load Voltage vs RPM @ Load Resistances	8
Graph: DC Load Current vs RPM @ Load Resistances	9
Graph: Open RMS L/L Voltage vs RPM	10
Graph: Open DC Voltage vs RPM	11
Graph: Fundamental Frequency vs RPM	12
Graph: Efficiency vs Current @ 750 RPM Constant	13
Graph: Cogging Torque	14

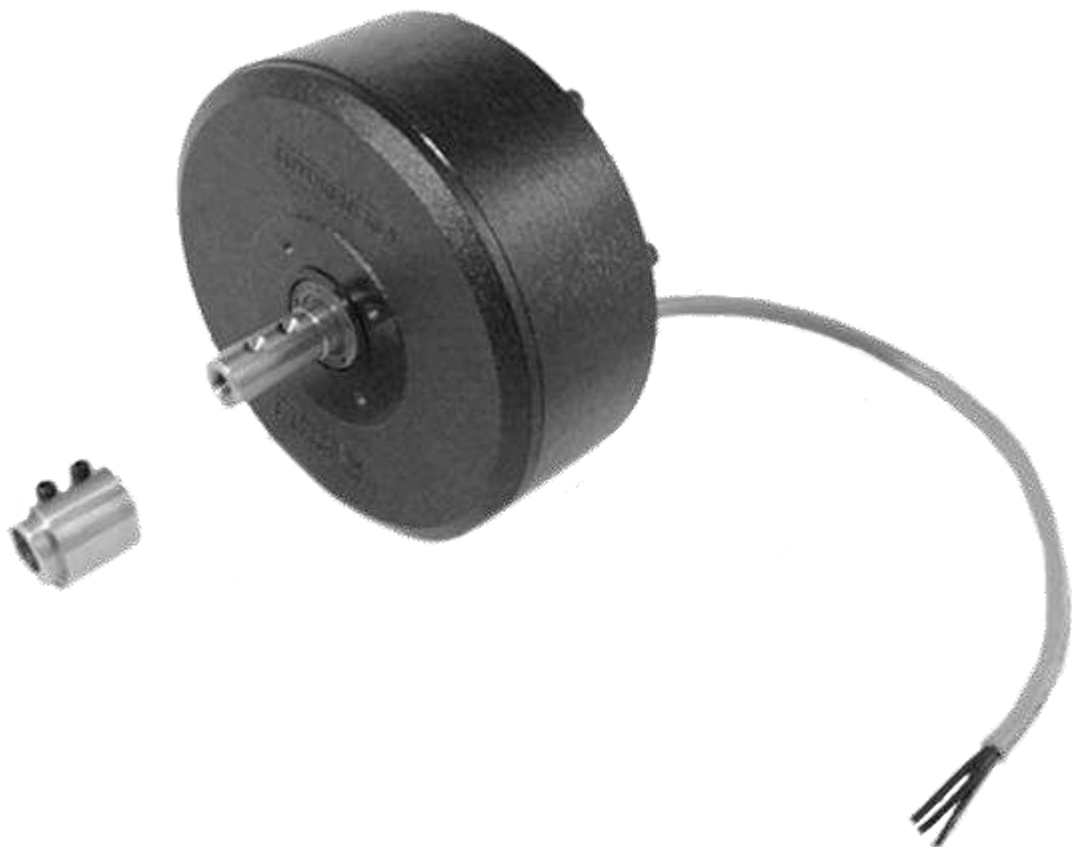

Dimensions

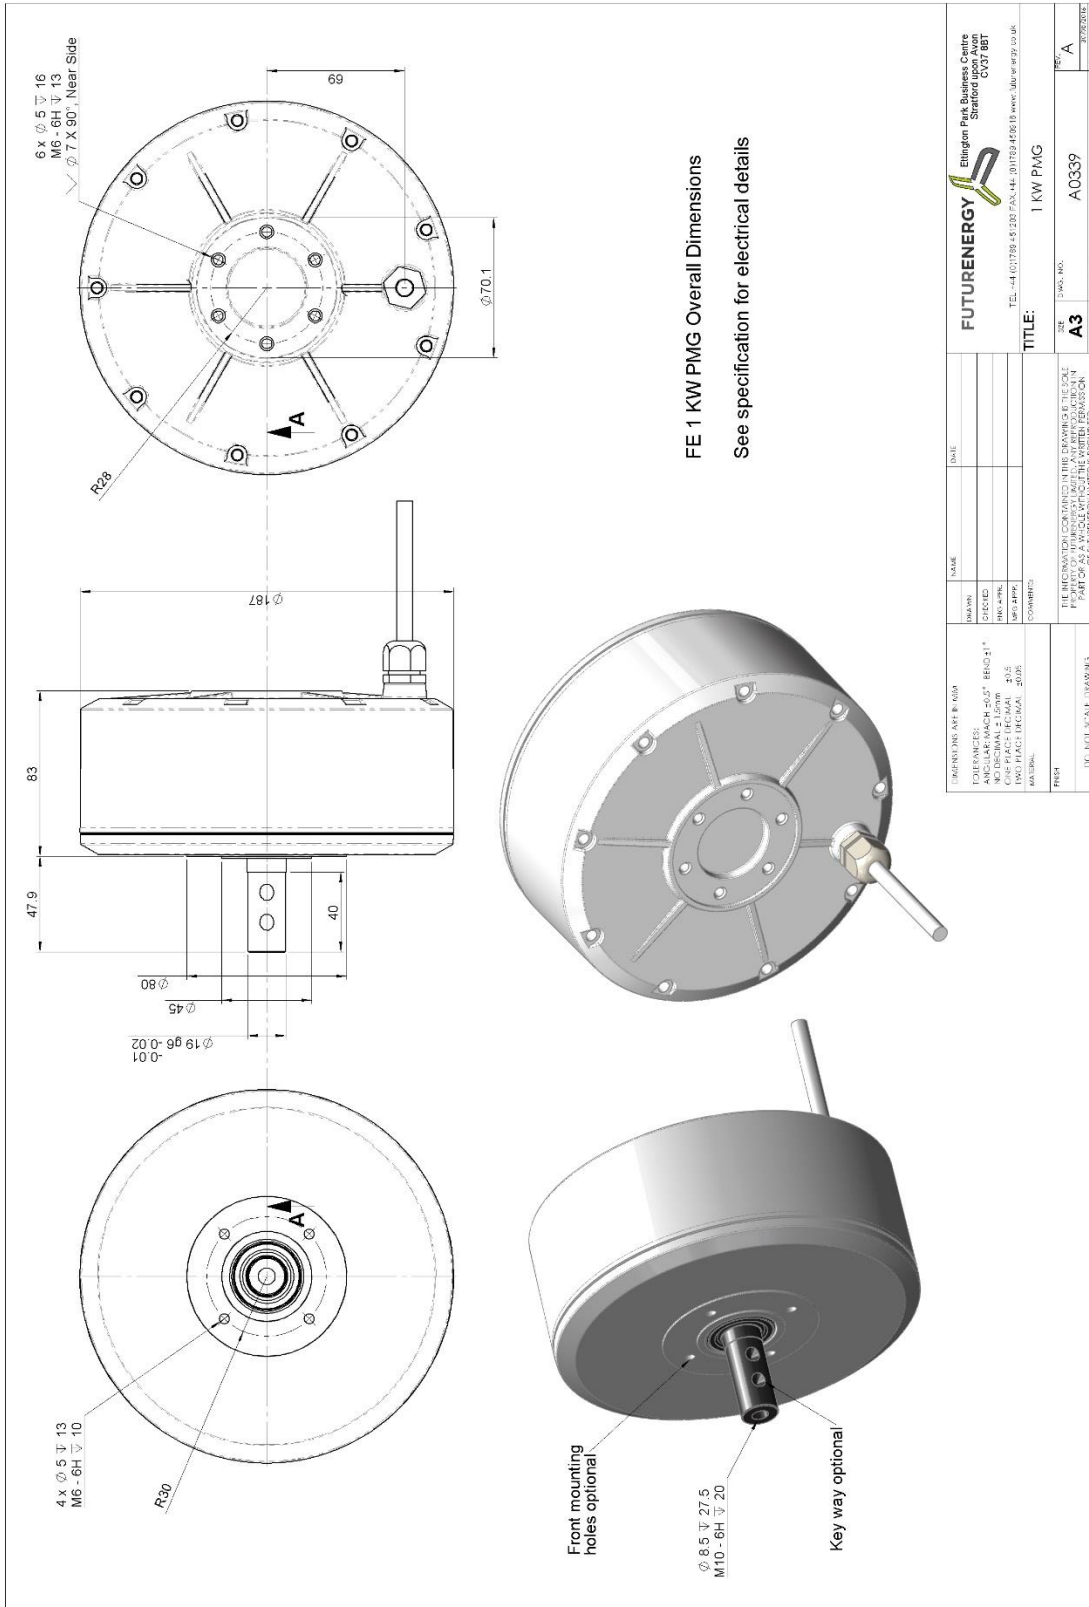

DESIGNED BY: []	DATE: []	FUTUREENERGY Ellington Park, 25, John Copley Stratford upon Avon CV37 8BT TEL: +44(0)1789 422877 FAX: +44(0)1789 425615 www.futureenergy.co.uk
CHECKED BY: []		
APPROVED BY: []		
DATE: []		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FUTUREENERGY LIMITED. IT IS FOR THE EXCLUSIVE USE OF THE CUSTOMER AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.		TITLE: 1 KW PMG DWG. NO.: A3 REV: A0339 SCALE: 1:1 SHEET: 01/1

Specification


Nominal Rated Power	1 kW (@ 6.4 ohms load)
Nominal RPM	800 RPM
Line / Line RMS Open Voltage	68.3V*
Nominal Line Current	10 Amps**
Maximum Current (100% Duty Cycle / Air Cooled 20°C)	20 Amps
Configuration	3 Phase, Star wound AC output
Line / Line Winding Resistance	0.36 Ohms
Nominal Self Inductance	0.7776 mH
Maximum Over-Load Power	1.5 kW
Efficiency	92 %
Maximum Cogging Torque (Excluding Shaft Seals)	< 0.5 Nm
Duty @ Nominal Power	100%
Insulation Class	H
Mounting	Any
Shaft Material	Stainless Steel
Magnet Material	NdFeB
Shell Material	LM25 Aluminium
Protection	IP54
Poles	12
Winding code	P123-T20-W1.5

* DC Voltage requires an additional bridge rectifier

** Voltage and current will depend on connected electrical system. For example; a system charging 48V battery bank will reduce generator voltage to the battery charge voltage and increase current. Values quoted assume fixed resistance loads.


Graph: Power vs RPM @ Load Resistances (Ω)

Power v RPM at load resistance

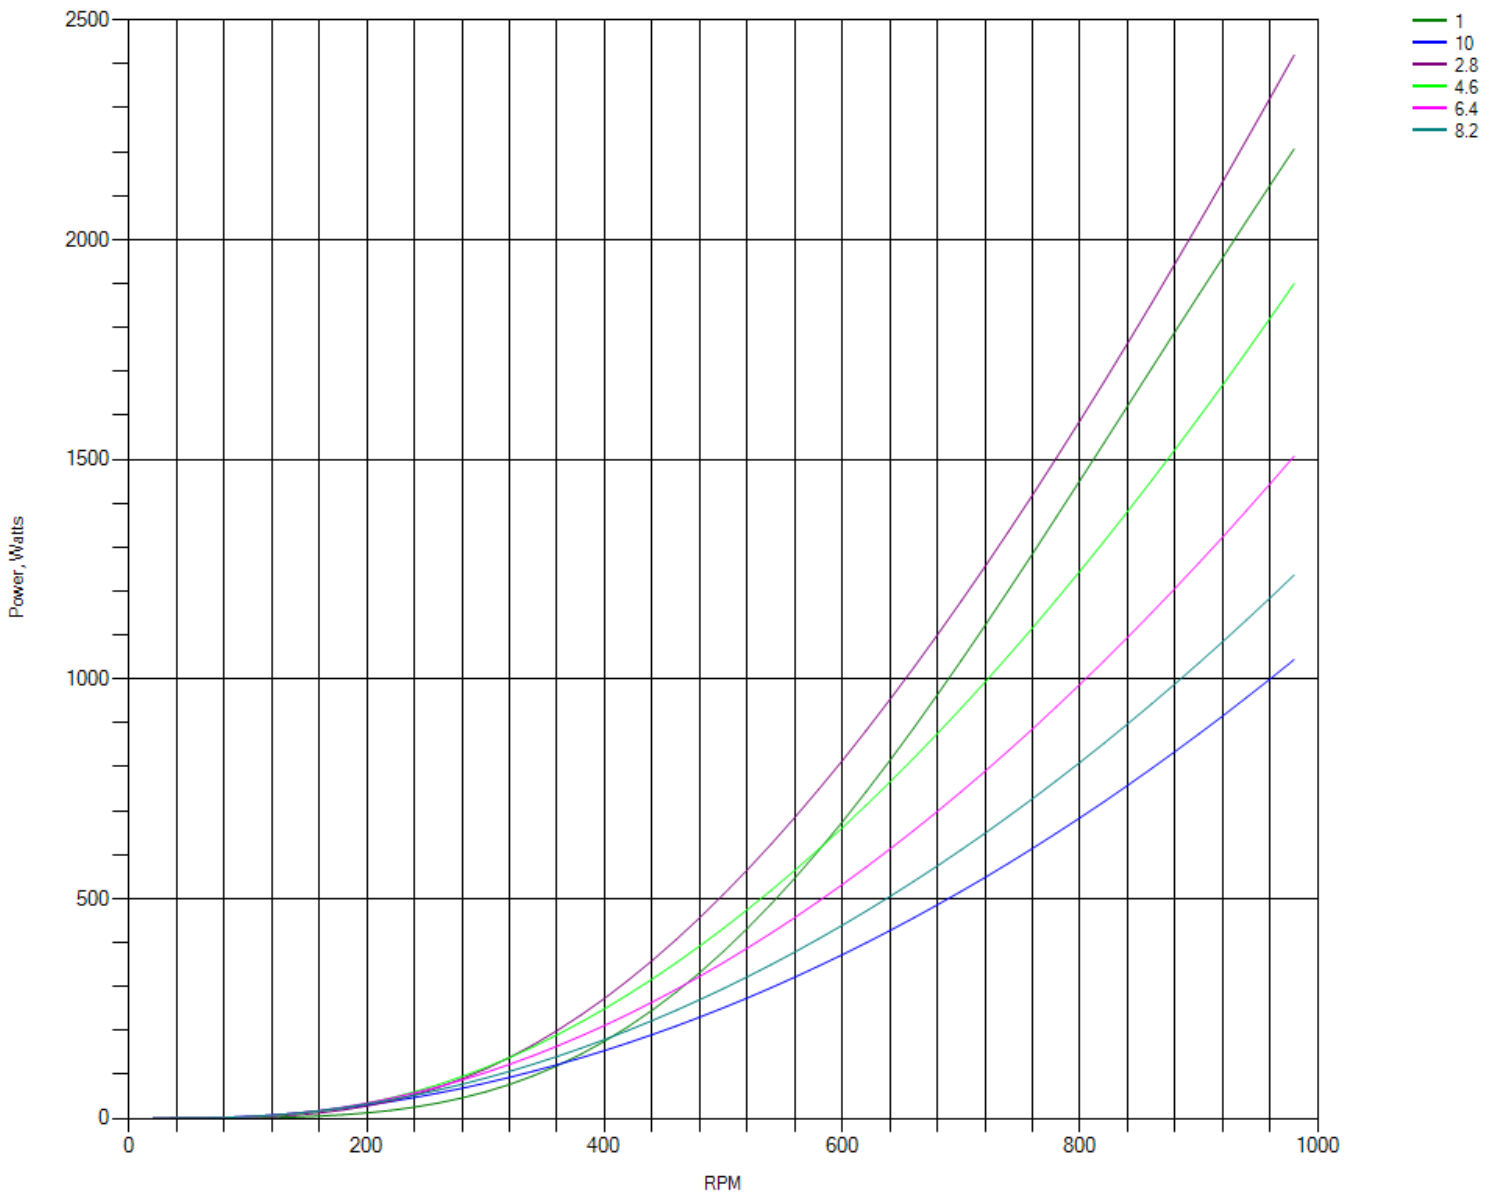


Graph: Terminal Voltage vs RPM @ Load Resistances

Terminal Voltage v RPM at load resistance

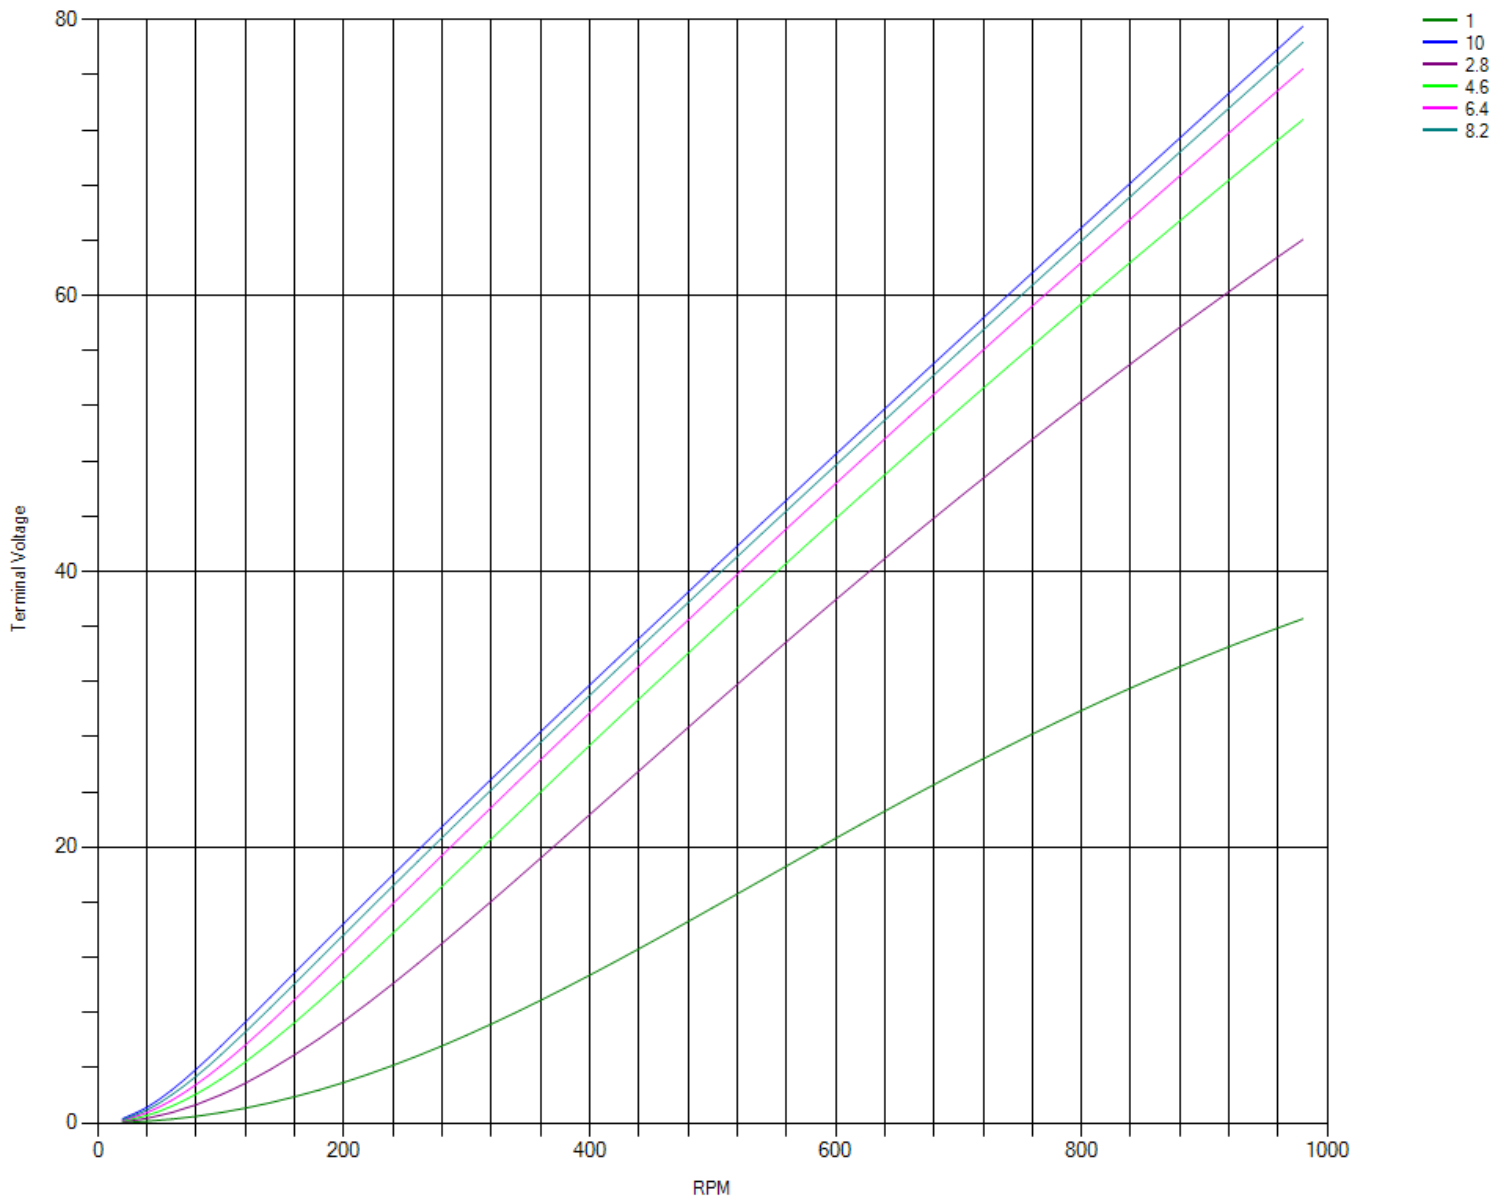


Graph: Terminal Current vs RPM @ Load Resistances

Terminal Current v RPM at load resistance

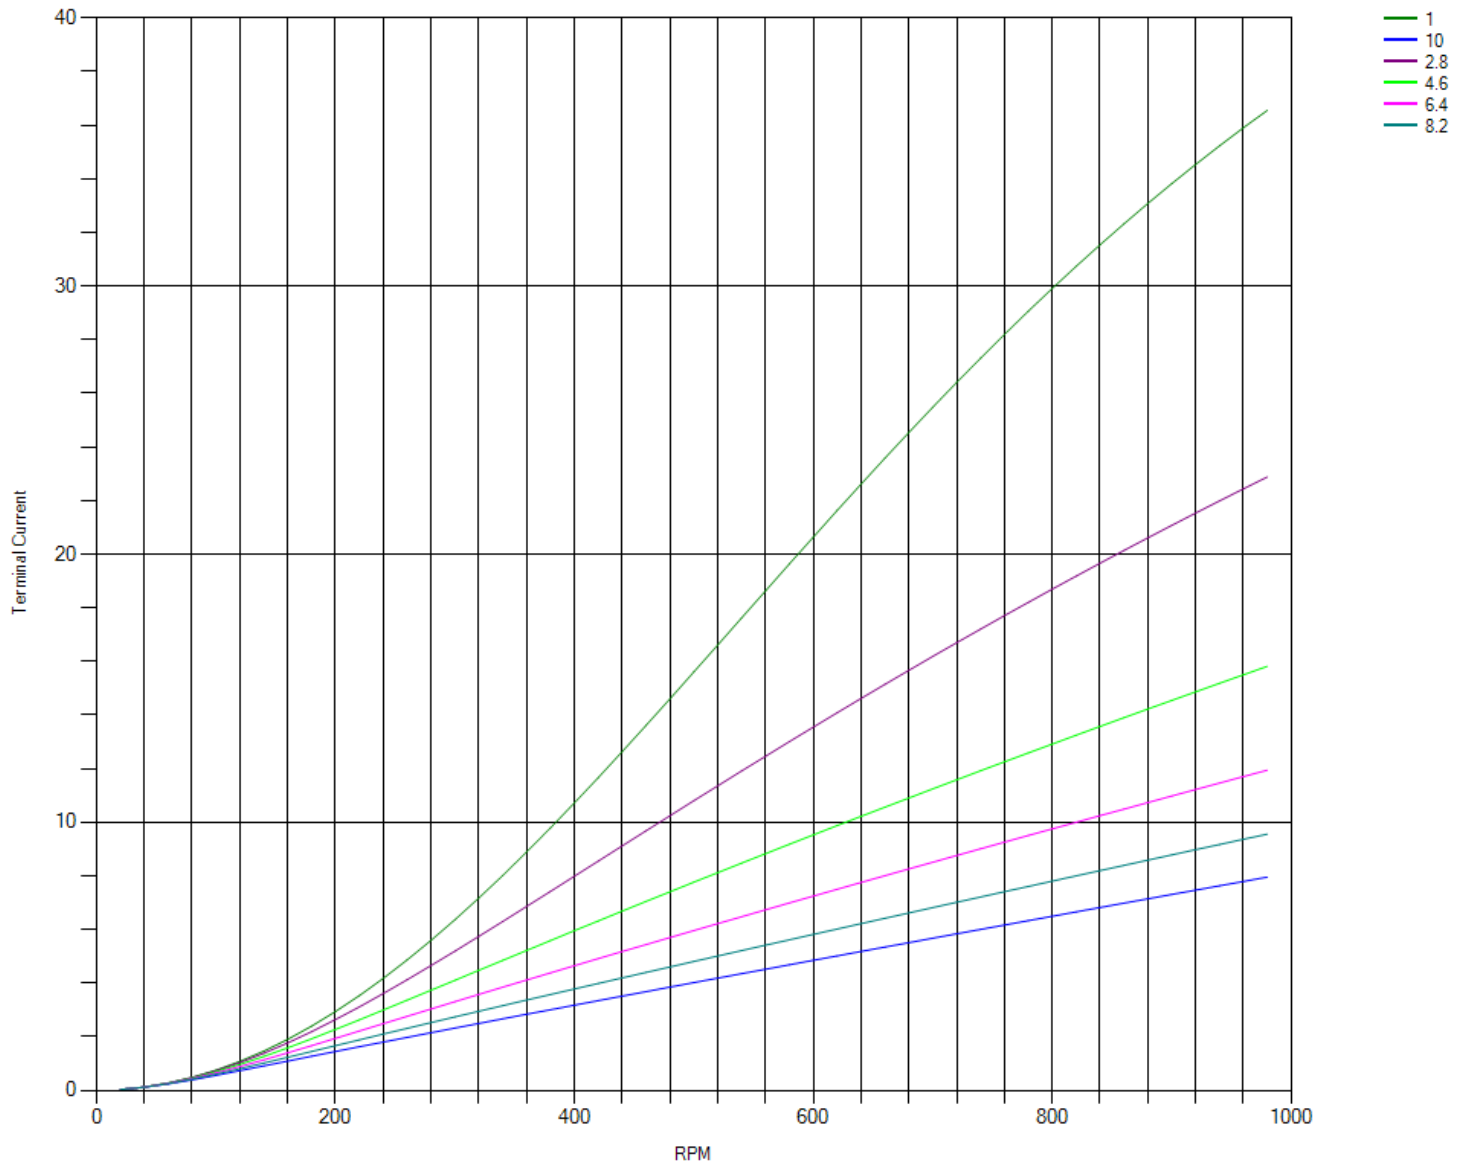


Graph: DC Load Voltage vs RPM @ Load Resistances

DC Load Voltage v RPM at load resistance

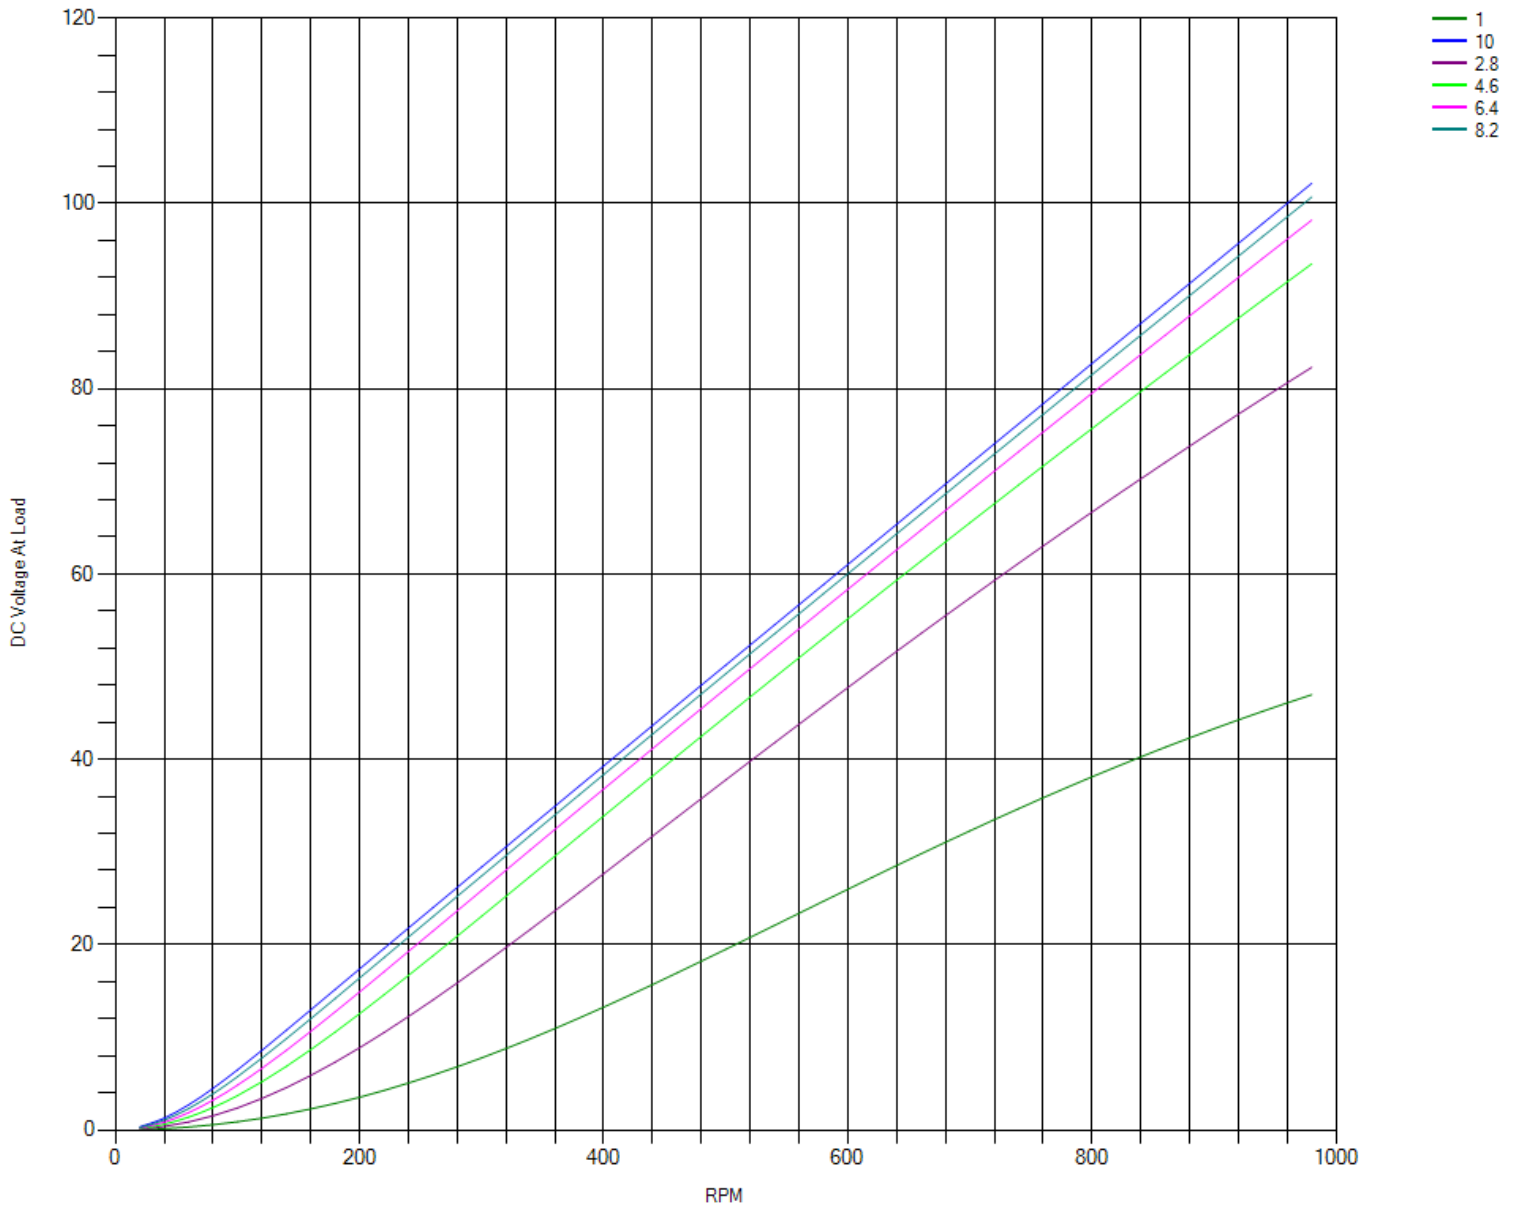


Graph: DC Load Current vs RPM @ Load Resistances

DC Load Current v RPM at load resistance

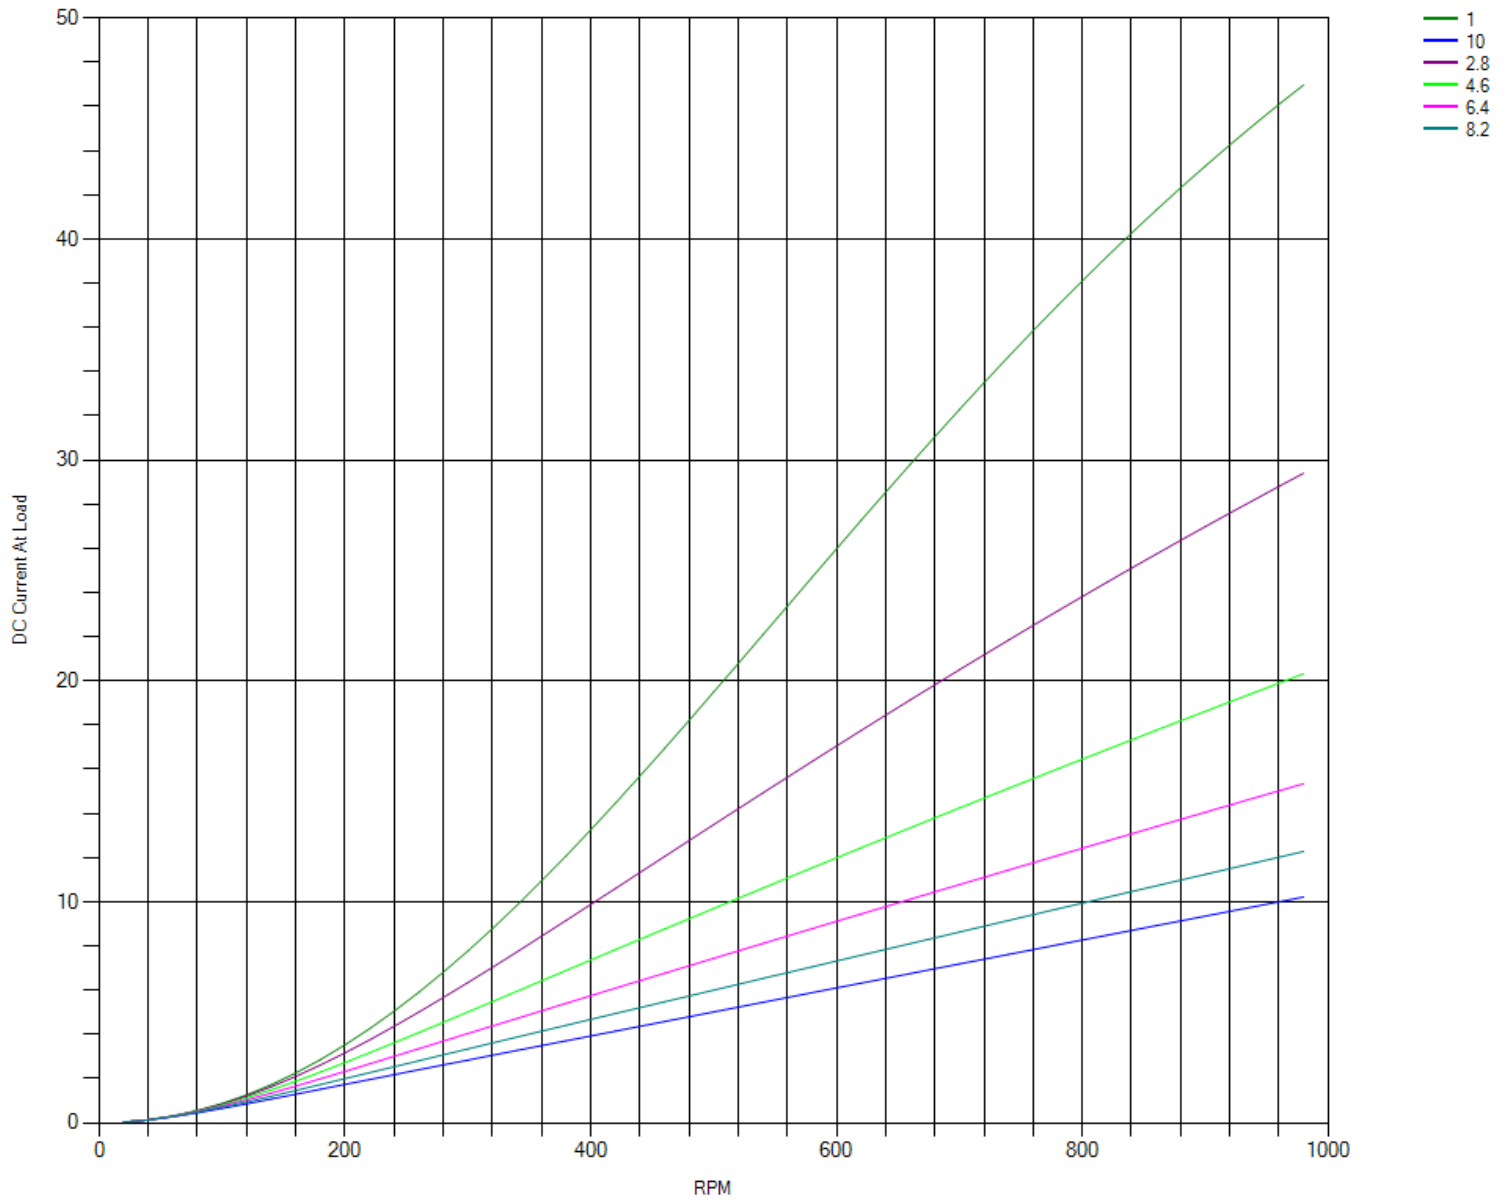


Graph: Open RMS L/L Voltage vs RPM

Open Line / line Voltage With No Load

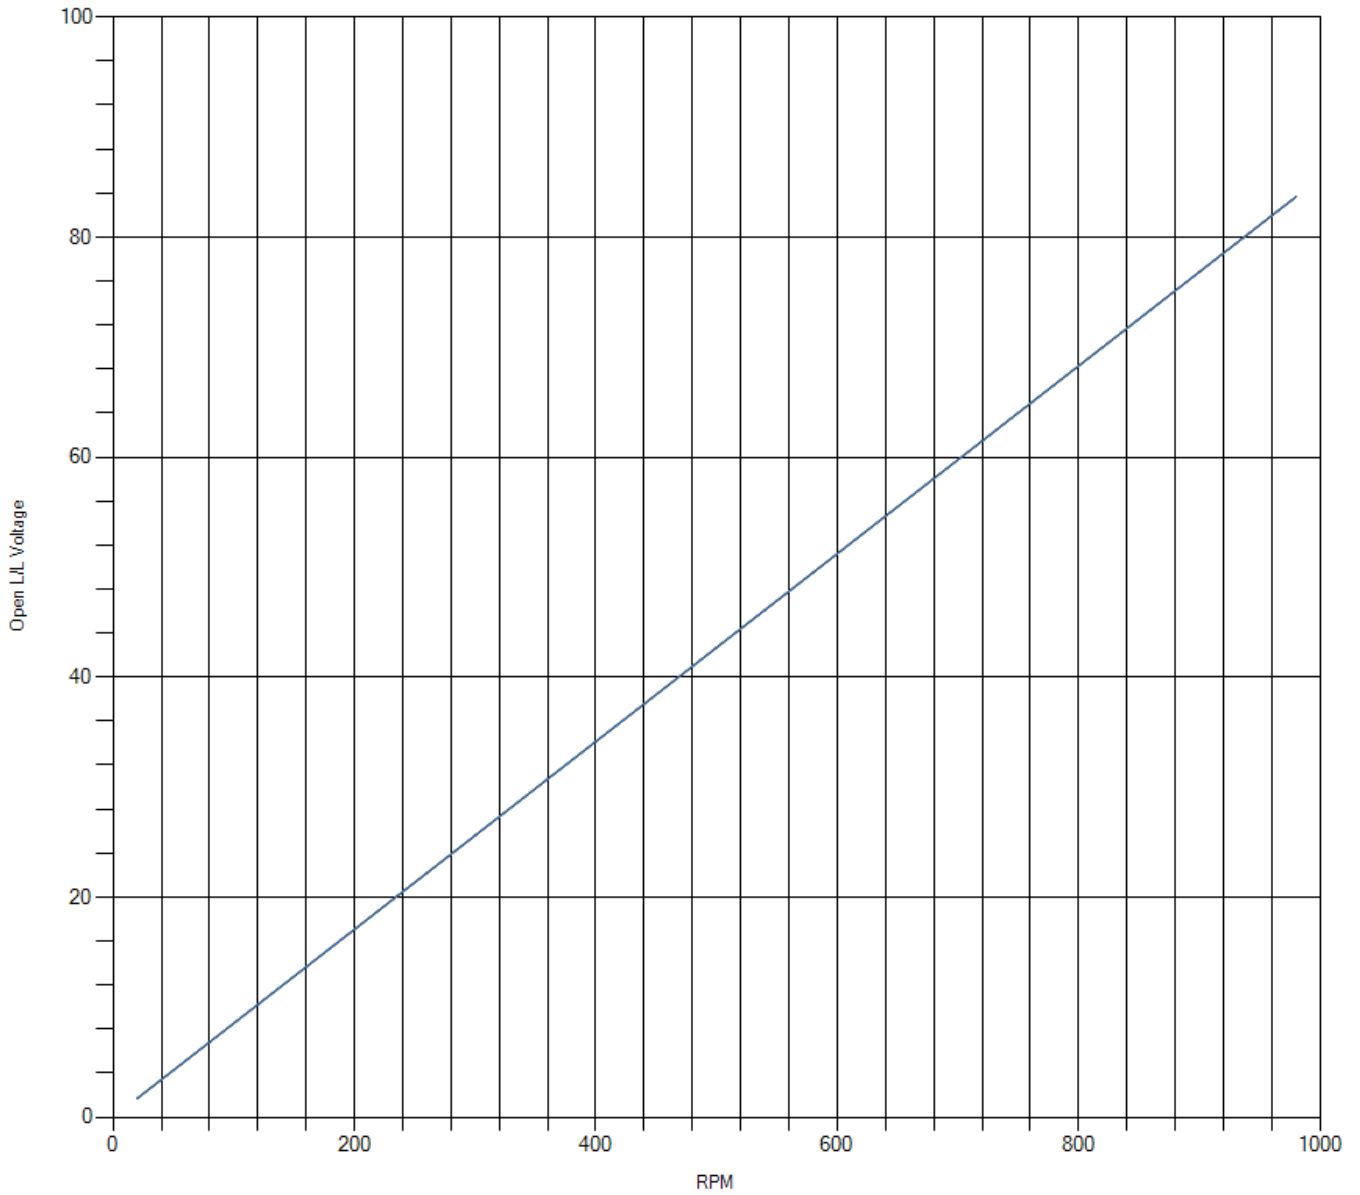


Graph: Open DC Voltage vs RPM


Open DC Voltage With No Load

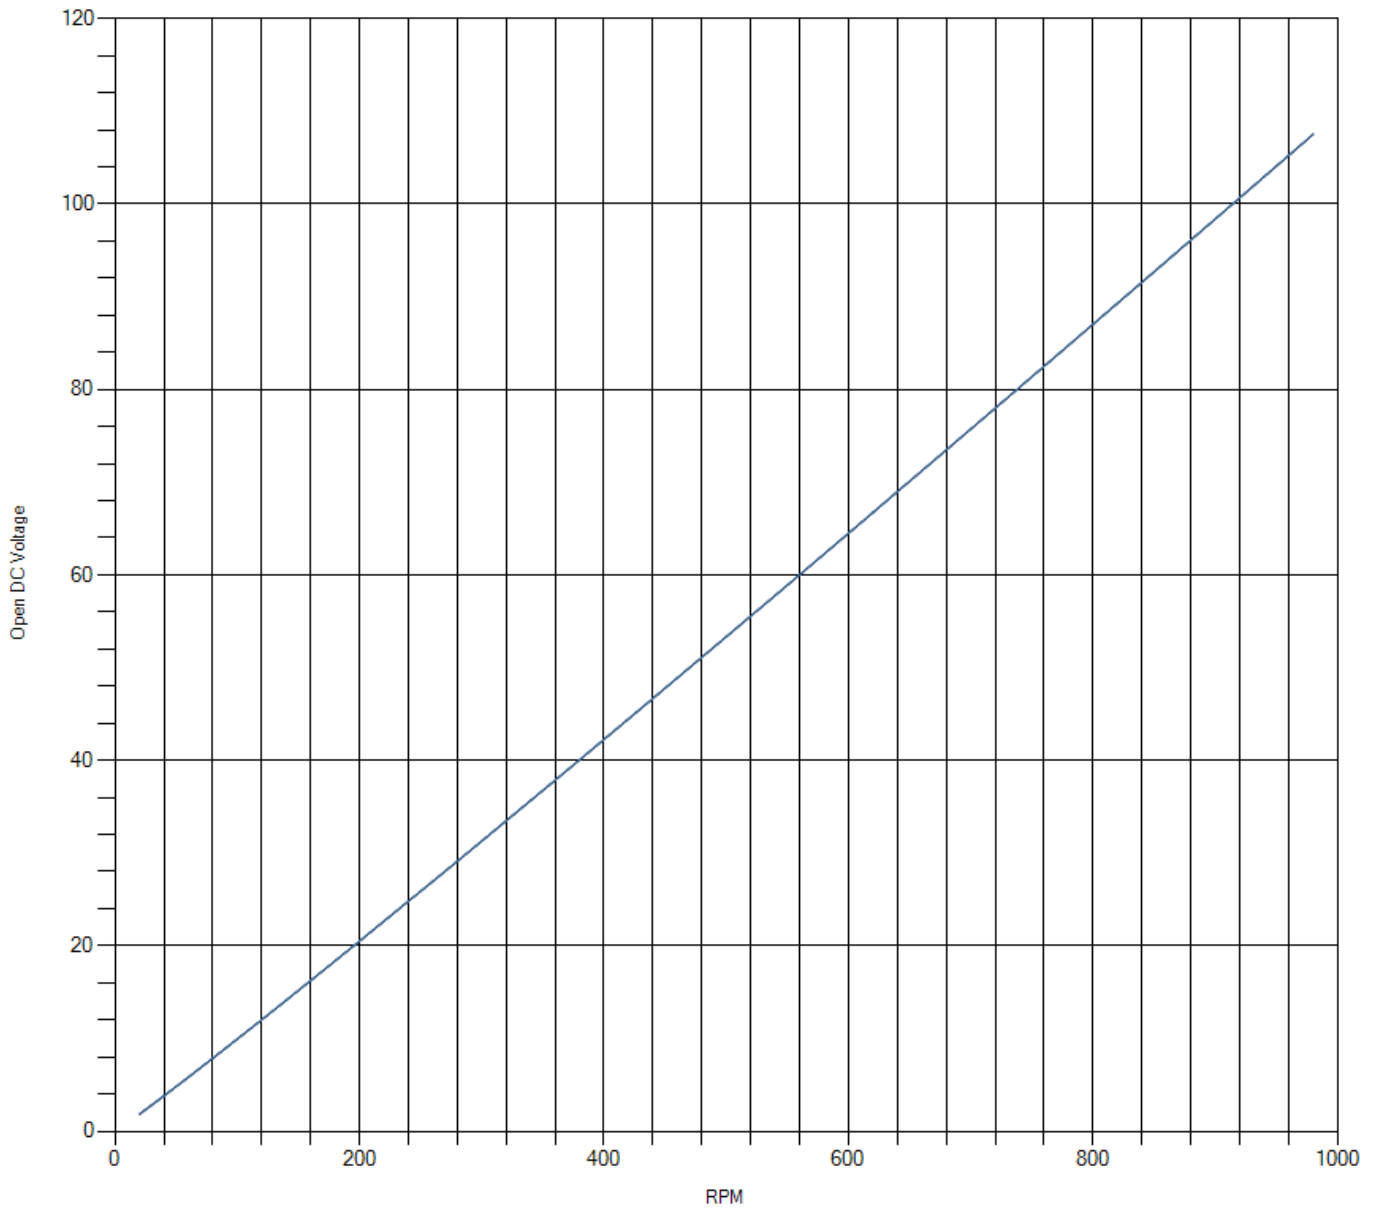

Graph: Fundamental Frequency vs RPM

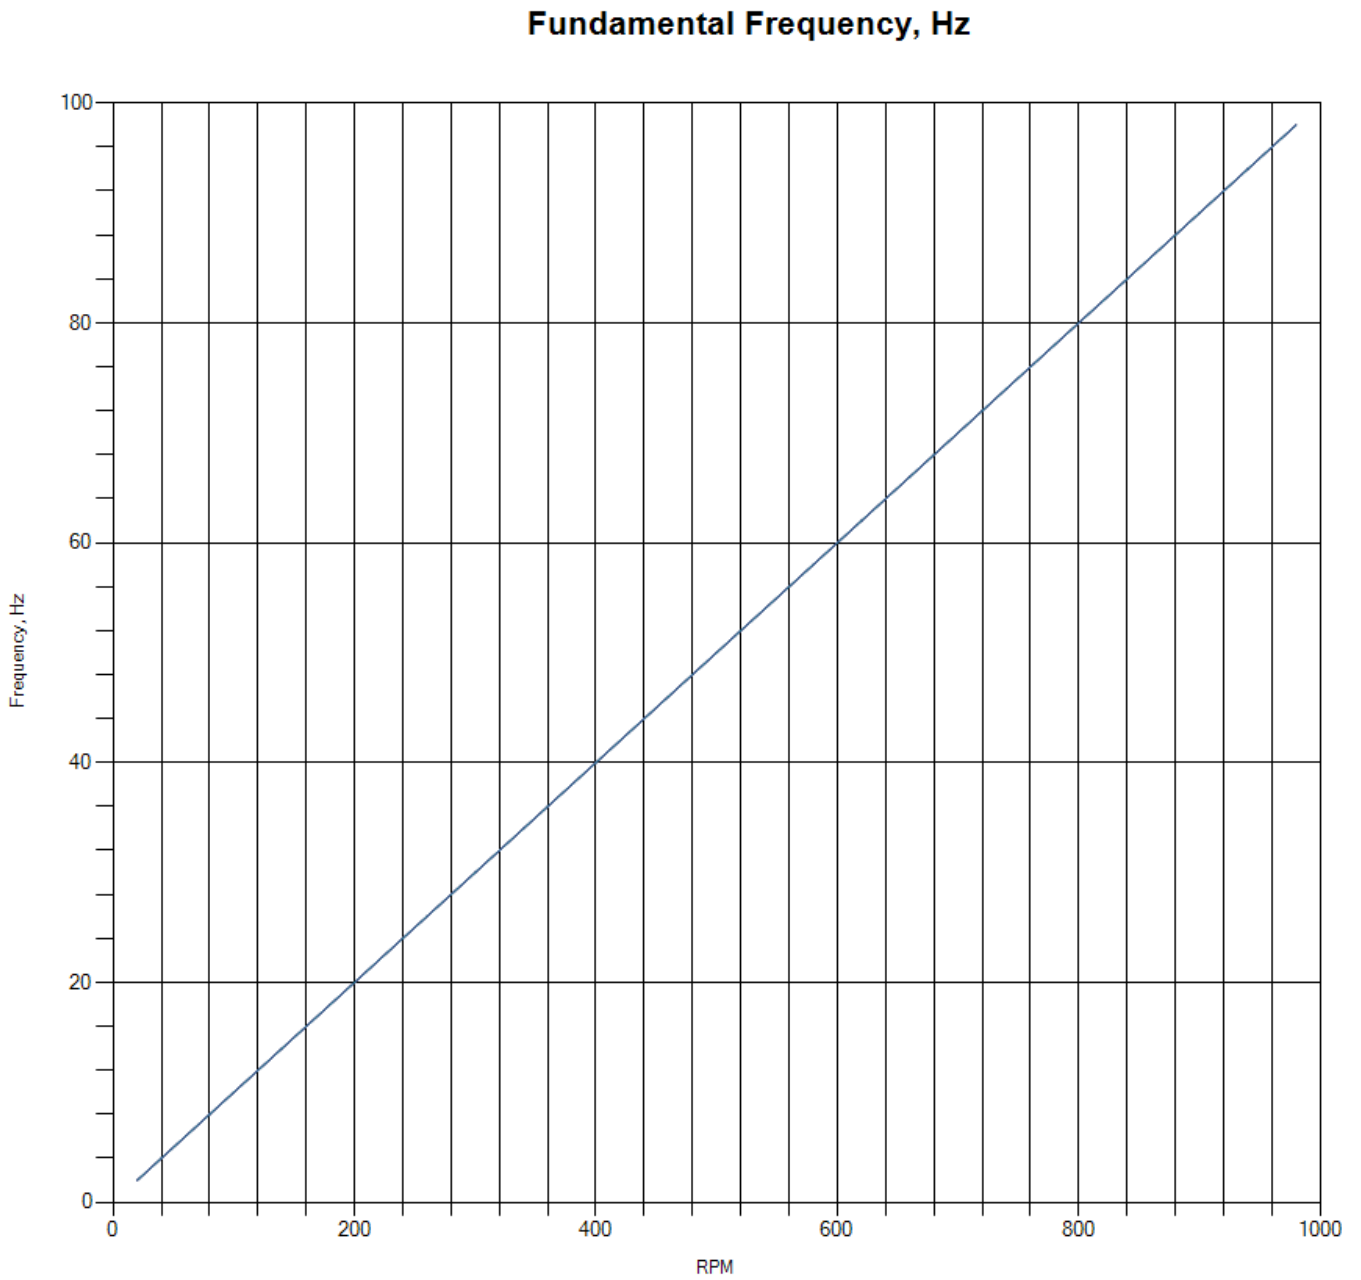

Graph: Efficiency vs Current @ 750 RPM Constant

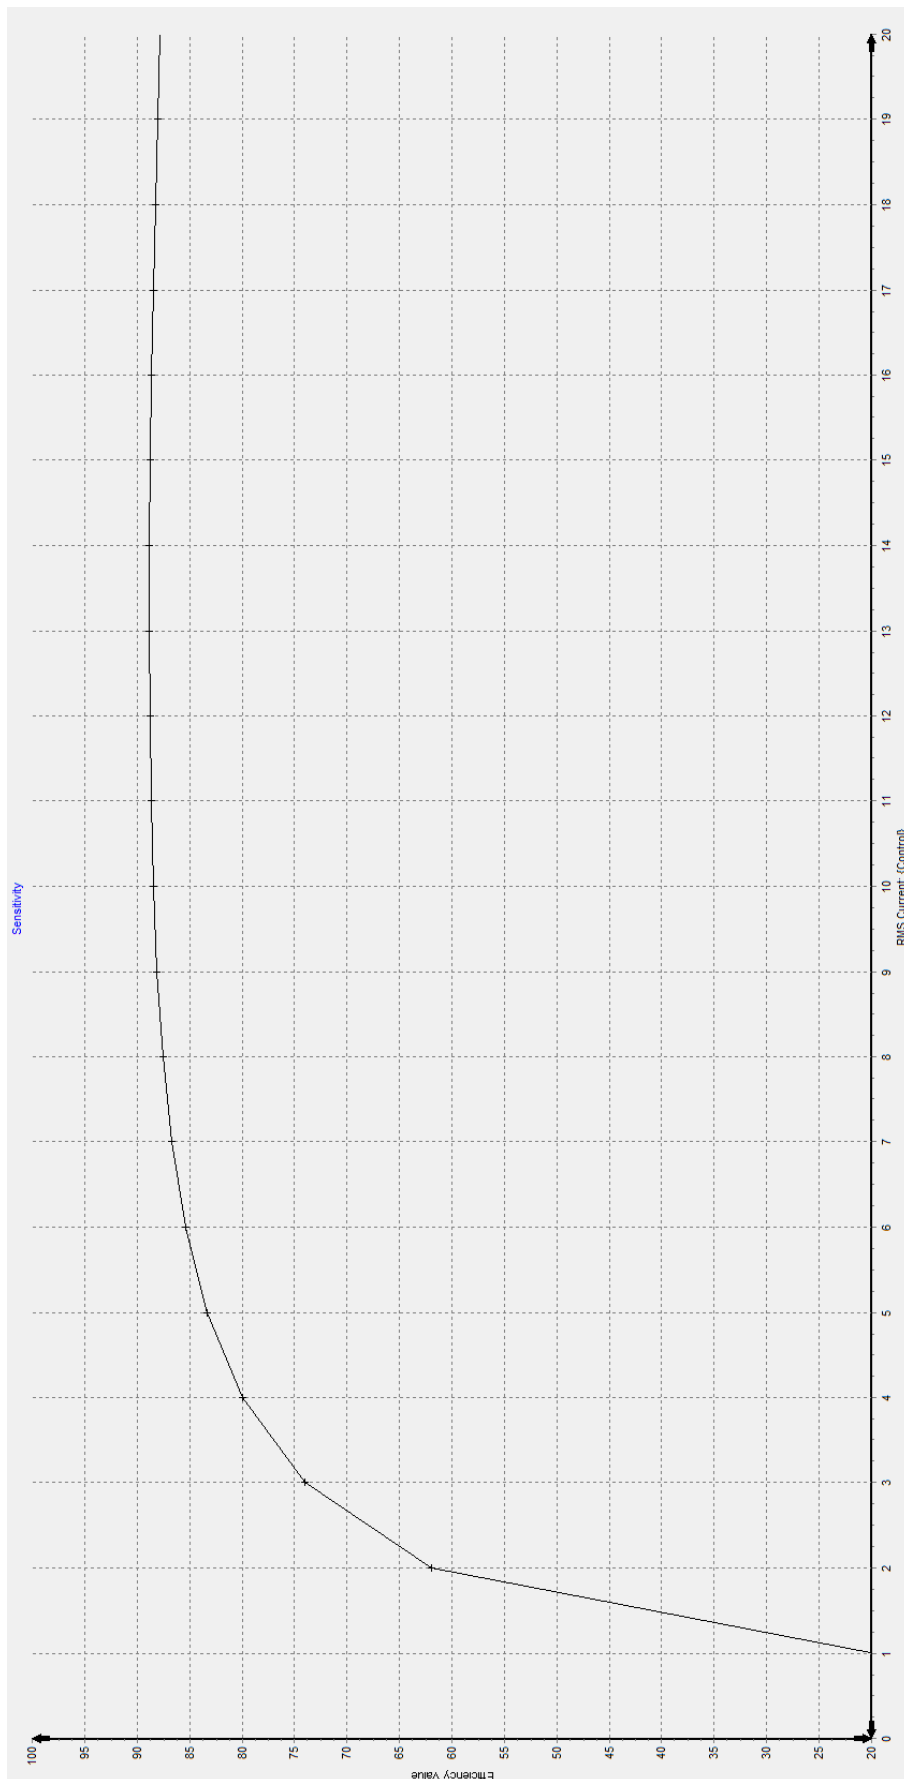

Graph: Cogging Torque

